

> R6TG




Straight manual valve, with iron pipe connection.
 Fluid of use: water and glycol solutions (max. 30 %)
 Temperature range: 5 ÷ 110 °C
 Max. working pressure: 16 bar

Materials

Body and main components: UNI EN 12165 CW617N brass
 Monobloc command stem: UNI EN 12164 CW617N brass
 Manual handwheel: ABS
 Gaskets: EPDM

Product code	Connections	Finishing	Type of knob	Type of tail piece
R6X032	3/8"M (G, ISO 228) x 3/8"F (G, ISO 228)	Chrome plated brass	Manual handwheel	Tail piece with self-sealing
R6X033	1/2"M (G, ISO 228) x 1/2"F (G, ISO 228)	Chrome plated brass	Manual handwheel	Tail piece with self-sealing
R6X034	3/4"M (G, ISO 228) x 3/4"F (G, ISO 228)	Chrome plated brass	Manual handwheel	Tail piece without self-sealing
R6X035	1"M (G, ISO 228) x 1"F (G, ISO 228)	Chrome plated brass	Manual handwheel	Tail piece without self-sealing
R6X036	1 1/4"M (G, ISO 228) x 1 1/4"F (G, ISO 228)	Chrome plated brass	Manual handwheel	Tail piece without self-sealing


Product code	G x B	H [mm]	I [mm]	J [mm]	K [mm]	L [mm]	M [mm]	W [mm]
R6X032	3/8" x 3/8"	69	56	15	22	77	42	27
R6X033	1/2" x 1/2"	73	60	17	26	84	42	30
R6X034	3/4" x 3/4"	86	55	21	32	81	49	38
R6X035	1" x 1"	93	69	26	39	106	49	46
R6X036	1 1/4" x 1 1/4"	97	85	30	49	135	59	53



Hydraulic features

R6X032, R6X033, R6X034, R6X035, R6X036

Kv obtained with Giacomini laboratory loss of pressure station

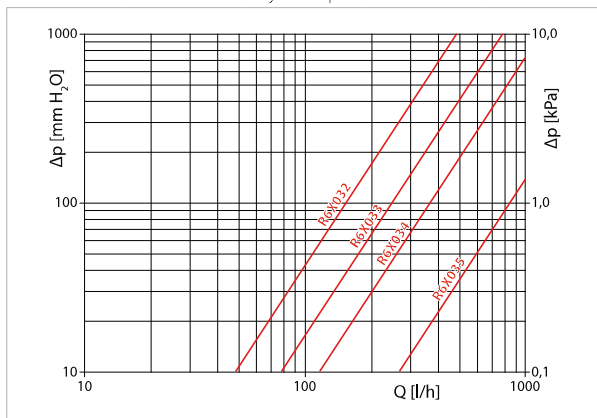

Handwheel position Fully Open

R6X032	R6X033	R6X034	R6X035	R6X036
1,58	2,50	3,65	8,45	-