


BALL VALVES

0210EN September 2017

VALVE FOR WATER FOR HEATING/COOLING SYSTEMS
AND NOT DANGEROUS GAS
STANDARD PORT - R252 SERIES



GIACOMINI
WATER E-MOTION

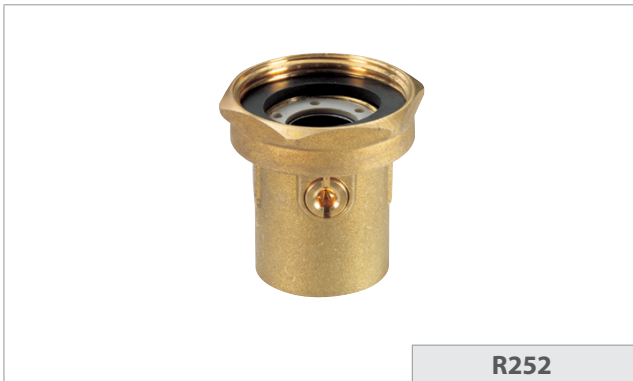

R252

Description

Ball valve, with female-female threaded connections with nut and gasket or with compression-female threaded connections with nut and gasket, for the connection of circulator or mixing valve.
Standard port.

Versions and product codes

Product code	Connections	Finishing	Notes
R252Y001	1"F (ISO 228) x Nut 1 1/2"F (ISO 228)	Brass	For circulator connection
R252Y002	1 1/4"F (ISO 228) x Nut 2"F (ISO 228)	Brass	For circulator connection
R252Y003	Compression Ø 22 x Nut 1 1/2"F (ISO 228)	Brass	For circulator connection
R252Y004	Compression Ø 28 x Nut 1 1/2"F (ISO 228)	Brass	For circulator connection

Technical data

Main features and materials

- Suitable for water for heating/cooling systems and not dangerous gas
- Standard port
- Valve made of UNI EN 12165 CW617N brass
- EPDM gasket
- EPDM O-Ring

Field of applications

- Temperature range: 5÷110 °C
- Max. working pressure at 20 °C with water and not dangerous gas: 0,7 MPa (7 bar)
- Max. static pressure with the valve completely open or closed: 4,0 MPa (40 bar)




Note.

For opening and closing operations use a screwdriver or a 5 mm Allen wrench.


Installazione example

Installation with circulator in the manifold group

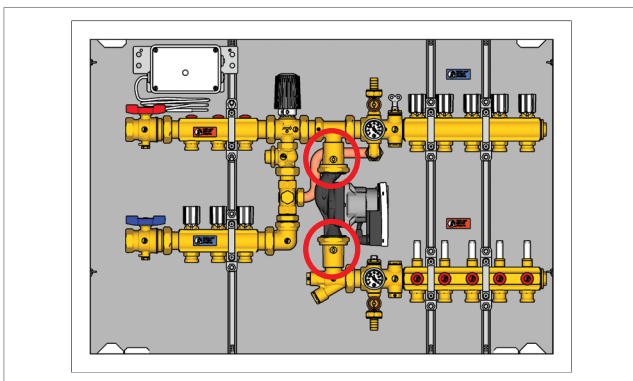

Dimensions and Kv

Product code	DN	A [mm]	B [mm]	C [mm]	Kv
R252Y001	18	1"F	1 1/2"F	53	24,6
R252Y002	25	1 1/4"F	2"F	66,5	36,3
R252Y003	18	Ø 22	1 1/2"F	58	24,6
R252Y004	18	Ø 28	1 1/2"F	58	24,6



Product specifications

R252

Ball valve, with female-female threaded connections with nut and gasket or with compression-female threaded connections with nut and gasket, for the connection of circulator or mixing valve. Suitable for water for heating/cooling systems and not dangerous gas. Valve made of UNI EN 12165 CW617N brass. Standard port. Temperature range: 5÷110 °C. Max. working pressure at 20 °C with water and not dangerous gas: 0,7 MPa (7 bar). Max. static pressure with the valve completely open or closed: 4,0 MPa (40 bar).


BALL VALVES

0210EN September 2017

VALVE FOR WATER FOR HEATING/COOLING SYSTEMS
AND NOT DANGEROUS GAS
STANDARD PORT - R252 SERIES



GIACOMINI
WATER E-MOTION

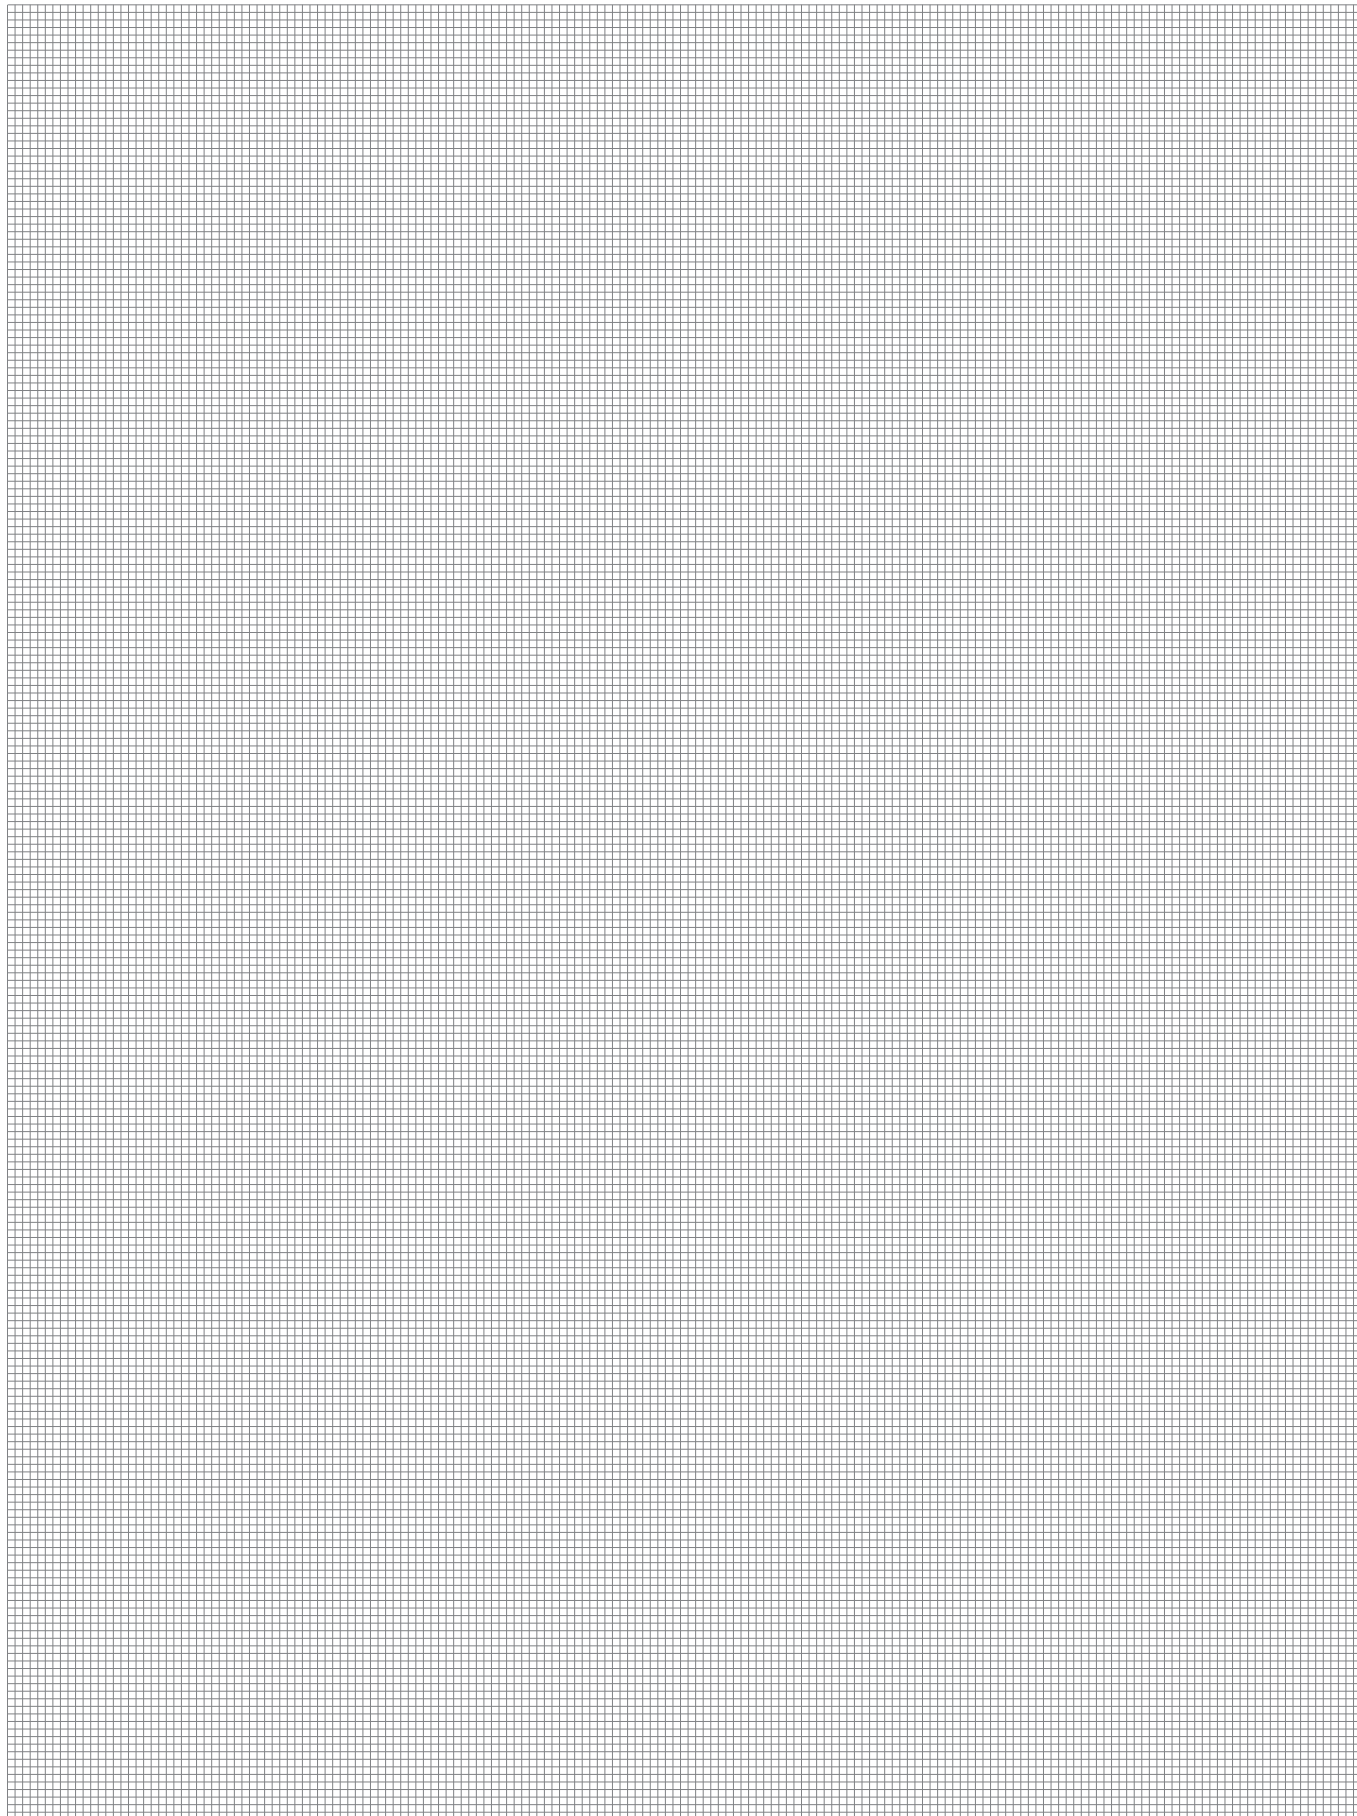

Additional information

For more information, go to www.giacomini.com or contact our technical assistance service: ☎ +39 0322 923372 📠 +39 0322 923255 ✉ consulenza.prodotti@giacomini.com
This document provides only general indications. Giacomini S.p.A. may change at any time, without notice and for technical or commercial reasons, the items included herewith.
The information included in this technical sheet do not exempt the user from strictly complying with the rules and good practice standards in force.
Giacomini S.p.A. Via per Alzo, 39 - 28017 San Maurizio d'Opaglio (NO) Italy