




Sunit P100



Height Înălțime (H) mm	Length Lățime (L) mm	Centres Interax (A) mm	No el Nr elemente pcs	Weight Greutate kg	Volume Volum l	Output / Putere termică (watt) Δt=30°C		Output / Putere termică (watt) Δt=50°C	
						ral	chrome	ral	chrome
743	500	465	7	3.12	1.81	87	67	167	128
743	600	565	7	3.41	1.95	98	75	187	144
943	500	465	9	3.98	2.31	112	86	213	164
943	600	565	9	4.35	2.49	125	96	239	184
1143	500	465	11	4.84	2.81	136	105	259	199
1143	600	565	11	5.30	3.03	152	117	291	224
1443	500	465	13	5.95	3.47	166	128	317	244
1443	600	565	13	6.49	3.73	185	143	354	272
1743	500	465	16	7.24	4.22	202	155	386	297
1743	600	565	16	7.91	4.54	226	174	432	332

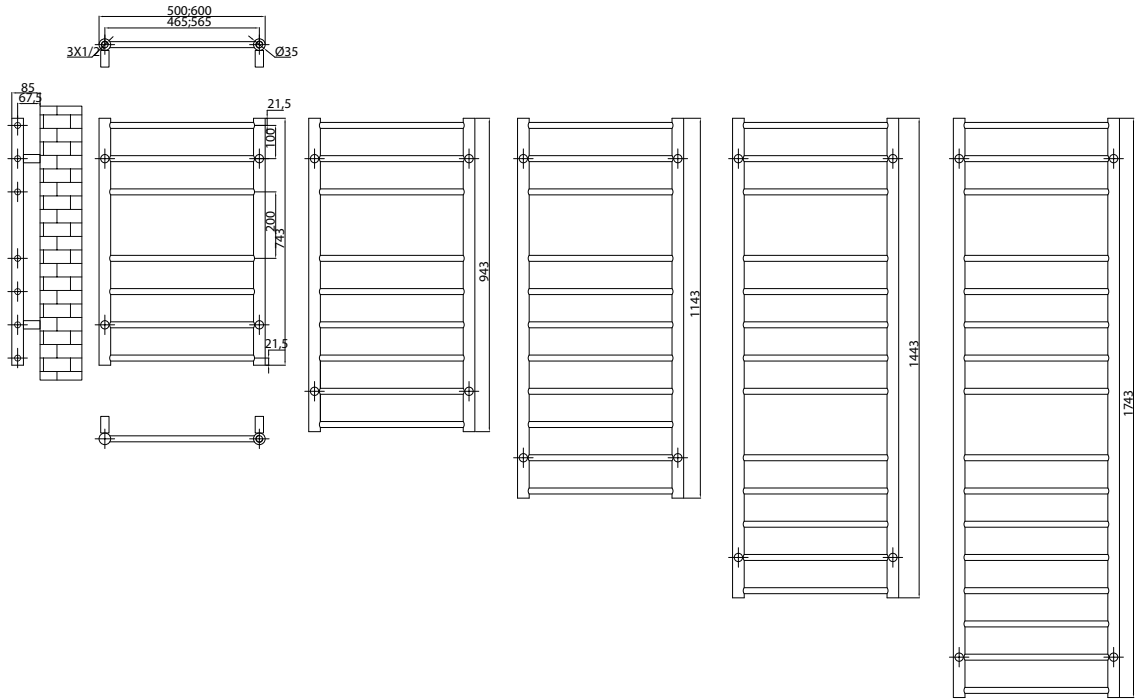

Hydraulic connections/
Conexiuni hidraulice



Recommended valves, not
included: SWING, pag 230
Robineți recomandate, nu sunt
incluși: SWING, pag 230

Max. working pressure/
Presiune max. de lucru 7 bar

Max. working temperature/
Temperatură max. de lucru 90 °C

Mounting kit included/
Kit montaj inclus: K13

Factory pressure test/
Presiune de probă: 10 bar

Elements&collectors/
Elemente și colectori: 18x35 mm